


### CTC066-T8-18W

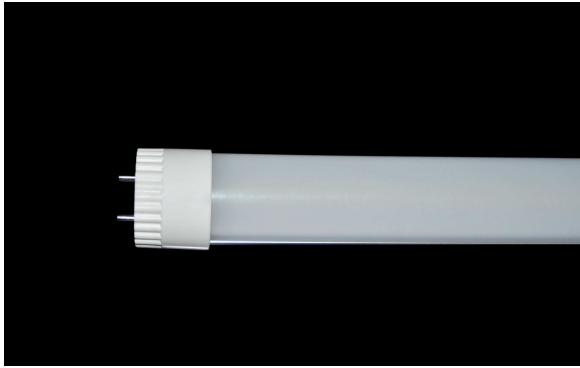

Input voltage: 85-265VAC 50-60Hz

Output current: DC440mA

Power: 18W

LED quantity: 288PCS x0.06W

Color: CW/NW/WW/Y/R/B/G

Beam angle: 120 degrees

Color temperature: Warm white (2700K-4500k), Natural white (4500K-5500k), Cool white (5500K-6700k)

Color rendering index: >75Ra

Luminous flux: Cool White (1600lm), Neutral White (1500lm) & Warm White (1400lm)

Illuminance: 140 LX (Clean) /135 LX (Frosted) (Height:2m)

Material: 6063 aluminum, PC

Power factor: ≥0.95

Dimension(mm): Φ28×1212 mm

Working temperature: -20℃— +55℃

Environment humidity: 10%-90%

Light decline: <3%/1kh

Lifetime: 50000 Hrs

Surface color: Silver



IP rating: IP20

Certificate: CE /RoHS (Driver certificate according to customer's requirement)



### Technical parameters

Light radiation pattern, illuminance diagram

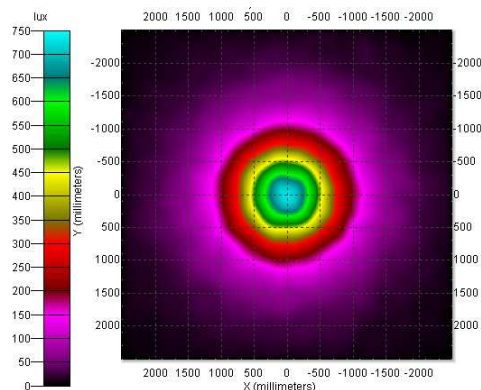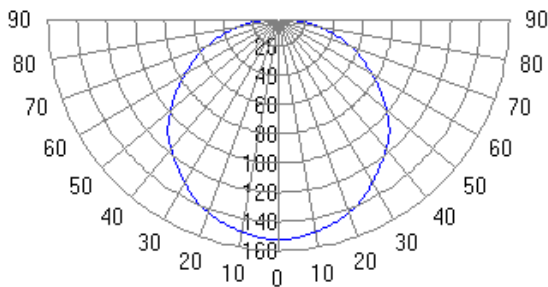


(\*This Light radiation pattern, illuminance diagram are according to Samsung LED light source)

# LAYCON GROUP COMPANY LIMITED

ROOM 1305 - 6, 13/F., BOSS COMMERCIAL INDUSTRIAL CENTRE, 28 FERRY STREET, KOWLOON, HONG KONG  
TEL: 852 2780 7165 2668 FAX: 852 2385 7768 EMAIL: LED@laycongroup.com

---

## Package

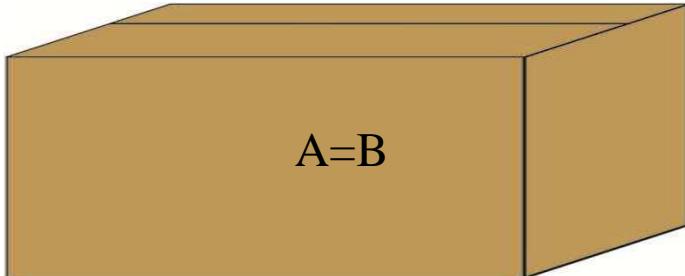

Inner box	Paper foam
Inner box size	
Outer carton	25PCS/CTN
Outer carton size	1200×250×370 (MM)
Net weight	6.25KG
Gross weight	7.25KG